PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
2405E012

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 7115-1843 * SEQUENCE Nº 9









Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7115-1843-02	**7157-3039-70**	**MXO**	**YSD 4514078957**	**MLER TRUCK XV**

Applicable Terminals for this Tool:

7115-1843-02			

Anvil		Wire Crimper		Insulation Crimper	
7115-1843XAD	(2)	7115-1843XW	(1)	7115-1843XID	(1)
CW (c) 2,52	*CW (i)* 4,30	*CW* 2,50		*CW* 4,30	


1 - VISUAL / MEASURED CHECK ITEMS


			Spec. (*)	Value (**)	O - ok X - ng NA - not aplicable		
	The two sides of the insulation grips are in the correct position.	O	0.00~0.20mm 0.20~0.60mm	0.19 0.51		The Bell Mouth is within the spec.**(*)**	O
	Not found any Bell Mouth in the insulation area.	O	0.00~0.50mm	0.21		The dimension of the cutting carrier is within the spec.**(*)**	O
	The lance height and shape are not deformed.	O	5º 5º	0.8 --		Bend up and Bend down are within the criteria**(*)**	O
	Not found any burr in the cutting carrier.	O	0.10~1.00mm	0.49		The exposed conductor is within the spec.(*)	O
	Not found any crack in the terminal.	O	3º	1.7		The terminal is not bent sideway, look-king from the top**(*)**	O
	The wire barrel is free from major burrs.	O	5º	0.2		The body of the terminal is not twisted**(*)**	O

(*) - Specified on Crimping Spec. **(**)** - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

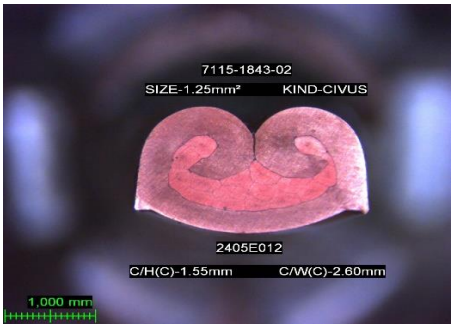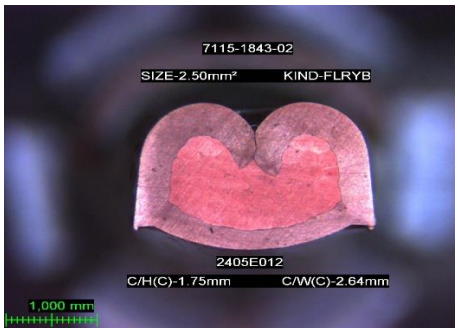2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1,55	1,55	3,69
	+/-0.05		

	NOMINAL	AVERAGE	Cmk
mm	1,75	1,75	3,28
	+/-0.05		

REMARKS:

Aplicable wire range >1.00mm²~2.50mm²
Wire size 1.25mm² C/W(I)-4.34mm
Wire size 2.50mm² C/W(I)-4.38mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 19147
Date: 2024/jun/21	Date: 2024/jun/17	Date: 2024/jun/14

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
2405E012

LOWER WIRE KIND & SIZE

Wire kind: CIVUS

Wire size: 1,25 mm^2

Nominal Cr. Height:	1,55	3,7	mm
+/-	0,05	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,549	3,703
2	1,552	3,703
3	1,554	3,706
4	1,557	3,704
5	1,551	3,699
6	1,551	3,696
7	1,551	3,692
8	1,557	3,697
9	1,556	3,699
10	1,553	3,705
11	1,552	3,707
12	1,550	3,711
13	1,547	3,711
14	1,551	3,708
15	1,551	3,703
16	1,551	3,701
17	1,546	3,700
18	1,547	3,697
19	1,551	3,697
20	1,551	3,699
21	1,551	3,701
22	1,554	3,702
23	1,557	3,707
24	1,561	3,709
25	1,550	3,712
26	1,545	3,712
27	1,540	3,714
28	1,552	3,701
29	1,554	3,698
30	1,555	3,696
31	1,548	3,694
32	1,544	3,692
33	1,551	3,690
34	1,554	3,699
35	1,551	3,700
36	1,551	3,702
37	1,548	3,703
38	1,546	3,704
39	1,550	3,708
40	1,555	3,709
41	1,557	3,712
42	1,554	3,714
43	1,548	3,713
44	1,545	3,706
45	1,556	3,701
46	1,558	3,697
47	1,562	3,696
48	1,551	3,701
49	1,558	3,705
50	1,550	3,707
Average	1,55	3,70
Cmk	3,69	5,31

UPPER WIRE KIND & SIZE

Wire kind: FLRYB

Wire size: 2,5 mm^2

Nominal Cr. Height:	1,75	4,5	mm
+/-	0,05	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,752	4,504
2	1,754	4,503
3	1,759	4,500
4	1,753	4,498
5	1,753	4,497
6	1,752	4,494
7	1,749	4,498
8	1,747	4,502
9	1,744	4,505
10	1,750	4,501
11	1,754	4,501
12	1,756	4,510
13	1,759	4,506
14	1,761	4,502
15	1,765	4,498
16	1,759	4,501
17	1,758	4,506
18	1,756	4,509
19	1,752	4,512
20	1,751	4,501
21	1,749	4,507
22	1,746	4,504
23	1,745	4,501
24	1,749	4,500
25	1,749	4,501
26	1,753	4,509
27	1,755	4,511
28	1,757	4,513
29	1,757	4,517
30	1,758	4,520
31	1,754	4,521
32	1,752	4,501
33	1,752	4,506
34	1,748	4,504
35	1,748	4,501
36	1,748	4,499
37	1,753	4,507
38	1,755	4,510
39	1,756	4,515
40	1,757	4,501
41	1,750	4,502
42	1,746	4,500
43	1,744	4,498
44	1,743	4,496
45	1,747	4,495
46	1,752	4,501
47	1,755	4,503
48	1,755	4,507
49	1,756	4,507
50	1,757	4,507
Average	1,75	4,50
Cmk	3,28	5,24


Acceptance criteria: Cmk>= 2,0

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 アプリケーター 消耗部品表

PRODUCT No. 製品番号	C0100-1189	TERMINAL No. 端子品番	7115-1843DD

Common PN 共通品番	929975-1	929975-3	–	–
	–	–		

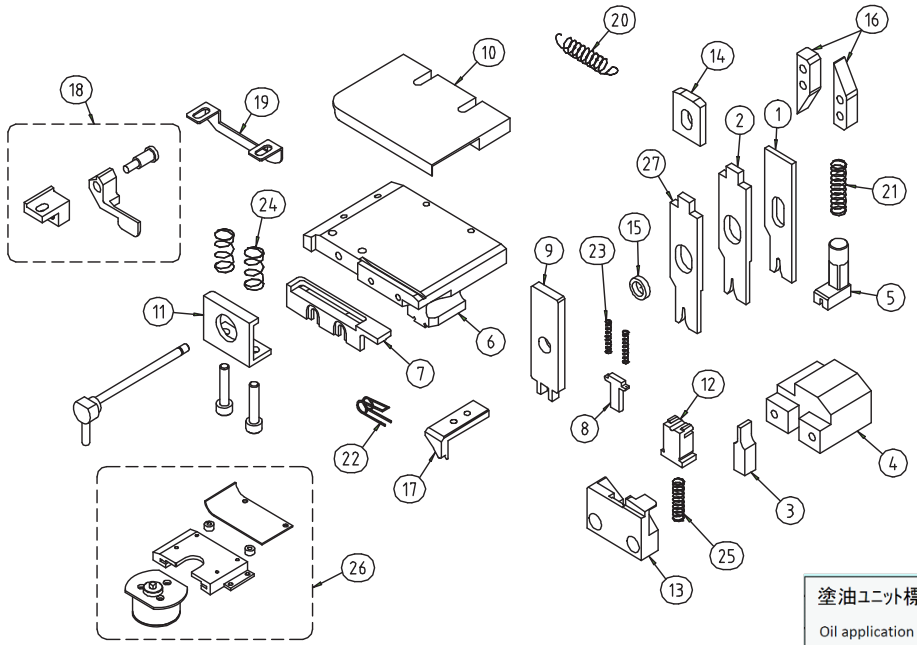

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7115-1843XW		WIRE CRIMPER ワイヤークリンパー
2	7115-1843XID		INSULATION CRIMPER インシュレーションクリンパー
3	7115-1843XAD		ANVIL アンビル
4	7115-1843XJE		ANVIL HOLDER アンビルホルダー
5	7115-1843XYY		SUPPORTING STOPPER サポーティングストッパー
6	7115-1843XYB		BASE ベース
7	7115-1843XYH		TERMINAL GUIDE PLATE B ターミナルガイドプレートB
8	48A47016	002	WIRE HOLDER 電線押さえ
9	48A47017	003	CUTTING PUNCH & WIRE HOLDER 切断ポンチ兼電線押さえホルダー
10	48A47020	A03	TERMINAL GUIDE PLATE A ターミナルガイドプレートA
11	48A47022	001	TERMINAL HOLDER ターミナル押さえ
12	48A19049	001	SHEARBLADE シャープレート
13	48A47025	002	OUTER SHEARBLADE アウターシャープレート
14	48A19007	016	INSULATION ADJUSTING PIECE インシュレーション調整コマ
15	48A19019	037	BUSH ブッシュ
16	48A47014	001	FEEDING CAM 送りカム

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
17	48A47013	001	FEEDING CLAW 送り爪
18	48A19100	005	WIRE STOPPER Assy 電線ストッパー アッシー
19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
20	48A47031		RETURN SPRING 戻しスプリング
21	48A47032	001	SUPPORTING STOPPER SPRING サポーティングストッパースプリング
22	48A19017	003	FEEDING CLAW SPRING 送り爪スプリング
23	48A19023	002	WIRE HOLDER SPRING 電線押さえスプリング
24	48A19074		TERMINAL HOLDER SPRING ターミナル押さえスプリング
25	48A19050		SHEARBLADE SPRING シャープレートスプリング
26	48A19999		TERMINAL OIL UNIT ターミナル塗油ユニット
	7115-1843XKP		BRACKET ブラケット
27			~~STABILIZER CRIMPER スタビライザークリンパー~~
〈OPTION オプション〉			
13	48A47025	101	OUTER SHEARBLADE アウターシャープレート
14	48A47042	002	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPRICATION POST 申請部署		ISSUED 発行
					HIB		ISSUE 2020/05/13 YAZAKI PARTS CO.LTD HAIBARA OFFICE
					DESIGNED DATE 設計日		
					2008/2/26		
					APPROVED 承認	DESIGNED 設計	
					T,Maki	T,Suzuki	
					2008/2/26	2008/2/26	